

# Troughing-Roller

# Utility Conveyor

# Models



The E-Z LIFT Troughing-Roller Conveyor is a medium duty conveyor designed for loose and packaged materials at inclines up to 30 degrees. The conveyor's idler roller bed provides minimal resistance, long life, and is ideal for continuous duty applications and processes.



Spring tensioned T-handles for quick dolly attach/detach.

### Typical uses include:

Sand, gravel, cement mixes, bricks, crushed products, chemical products, grains, packaged products, and sorting processes

### Features include:



- Heavy duty 2 ply smooth rubber belt
- 2" diameter steel idler rollers on 30" centers at 15 degree angle, precision bearings
- 7/8" O.D. high strength steel tubing for 12' & 16' models, 1-1/4" O.D. on 21' through 36' models
- 15" frame height
- Approximate 140 FPM belt speed
- Conveyor belt take-up adjustments
- Self cleaning drive and idler belt pulleys
- Drive mounted at side of discharge end
- For electric motor – direct drive speed reducer
- For gas engine – internal V-belt and roller chain reduction, and safety guards
- Fork pockets
- Operating, maintenance, and safety instructions

### Accessories:

- Electric motor or gas engine
- Start/Stop switch for electric motor
- Hopper
- Belt wiper
- Dolly and hitch assembly
- Tail-light assembly
- Towable elevating carriage

### Options:

- Mini-cleated belt
- High profile cleated belts in numerous patterns
- Forward/Stop/Reverse switch for electric motor
- Sleeve bearings in PVC idler rollers

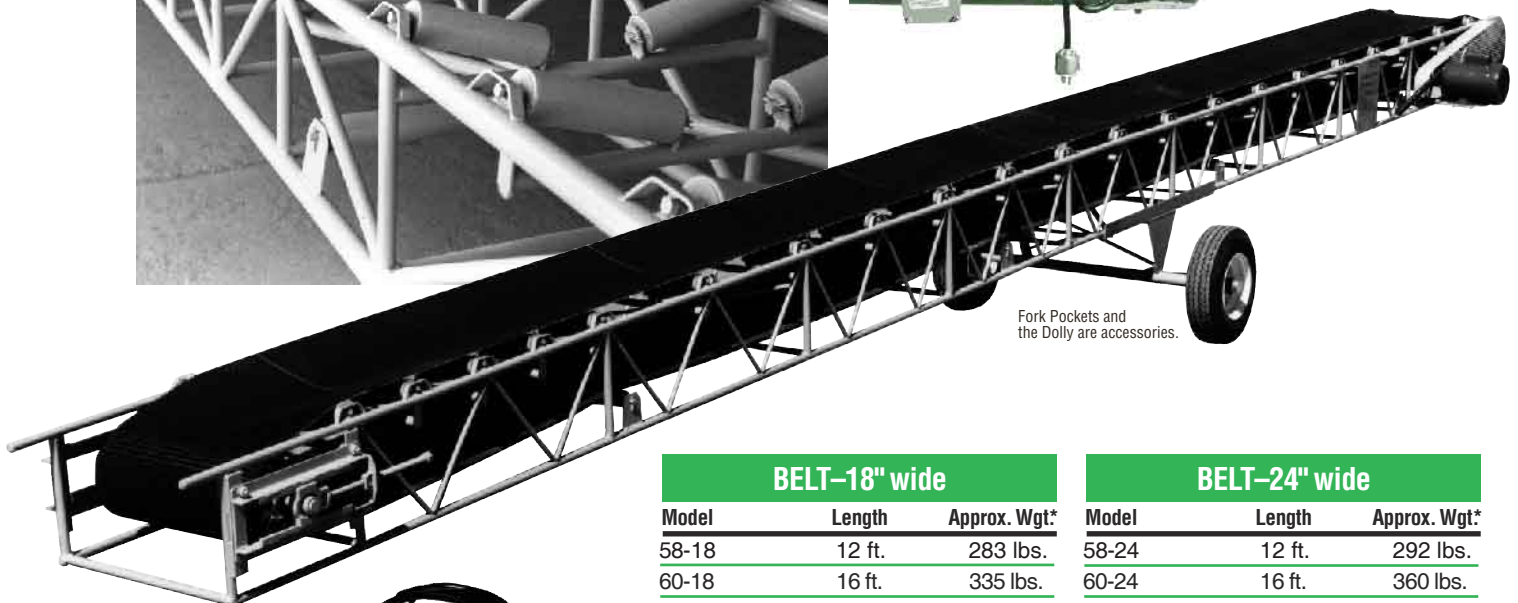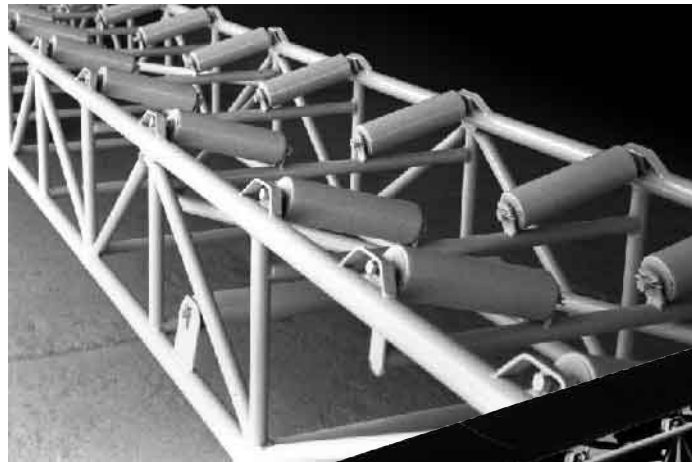

Fork Pockets and the Dolly are accessories.



Tail-light assembly

## Multilift, Inc.

12410 W Cedar Dr, Lakewood, CO 80228  
 Denver Area: 303.733.5533 FAX 303.733.5642  
 North American Toll Free: 1.800.821.9966

BELT-18" wide		
Model	Length	Approx. Wgt*
58-18	12 ft.	283 lbs.
60-18	16 ft.	335 lbs.
61-18	21 ft.	400 lbs.
63-18	26 ft.	495 lbs.
65-18	31 ft.	630 lbs.
67-18	36 ft.	790 lbs.

CAPACITIES – at 30° incline		
Lbs./Cu. Ft.	Tons/Hr.	
30	27	
50	45	
75	67	

BELT-24" wide		
Model	Length	Approx. Wgt*
58-24	12 ft.	292 lbs.
60-24	16 ft.	360 lbs.
61-24	21 ft.	445 lbs.
63-24	26 ft.	555 lbs.
65-24	31 ft.	710 lbs.
67-24	36 ft.	900 lbs.

CAPACITIES – at 30° incline		
Lbs./Cu. Ft.	Tons/Hr.	
30	36	
50	60	
75	90	

Specifications subject to change without notice  
 \*Weight w/o accessories